


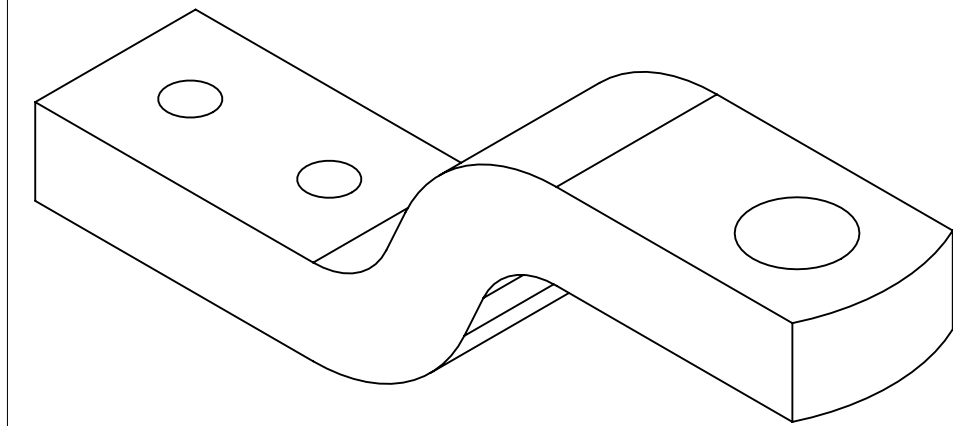

NOTE :-

1. OPTIONAL MATERIAL :SAE 5150/SAE 4140/42Cr MoS4.
2. HARDENED & TEMPERED TO 350-400BHN.
3. FOR PRIMING REFER PS529-PROCEDURE 2.
4. HOLES DIA TO BE FREE FROM PRIME PAINTING.
5. ALL SHARP CORNERS TO BE REMOVED.

		3.DIM R30 ,60 ,24 ,290 WERE CHANGED TO REF. DIM					
ER1810004848	AC	2.TOLERANCE UPDATED FOR Ø 17, 35 ,175 1.DIM 290 WAS 289	AR	NVC	RAW	28/02/18	
600000010304	AB	REDRAWN WITH 3D REF.	VHD	NVC	RAW	03/09/15	
E,R,NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE